



MW 65-12h

12V 65Ah

Compliance with batteries

PN-EN 60896-21:2007
 PN-EN 60896-22:2007
 PN-EN 61056-1:2008
 PN-EN 61056-2:2003(U)
 PN-E-83016:1999

Batteries **MW Power** type **MW** are designed for use both in emergency power supply systems and other applications where the battery operates cyclically. Recommended use of the batteries: UPS backup power supply, automation systems, cash registers, as a source of energy in portable devices, charging power engines and other equipment in a cyclic mode. For discharges of 50% can reach 500 cycles.


Designed service life 12 years to range of 20-25 ° C.



Specification

Nominal voltage	12V	
Nominal capacity	65,0 Ah	
Dimensions	Lenght	260 mm
	Width	170 mm
	Height	202 mm
	Total height	205 mm
Weight	21,5 kg	


Dimensions

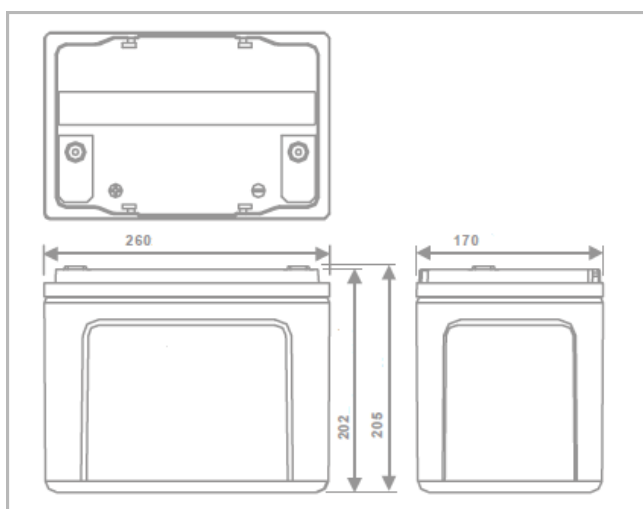

Characteristic

Capacity for 25 ° C and cut-off voltage 10.5 V	20h	67,8 Ah
	10h	65,0 Ah
	5h	55,5 Ah
Internal resistance	charged battery	7,5 mΩ
	for 20°C	100%
Capacity	for 0°C	85%
	for -15°C	65%
Self-discharge	3 m-ths	91%
	6 m-ths	82%
	12 m-ths	64%
Terminal	Bolt M6	
Charging	Standby use	13,50-13,80V
	Cyclic use	14,40-15,00V
Max. charge current	20,5 A	
Max. discharge current	700 A (5 sec.)	
Temperatures of work:		
Discharging: -20°C ÷ 50°C		
Charging: -20°C ÷ 50°C		
Storage: -20°C ÷ 50°C		

Input-discharge at 25 ° C

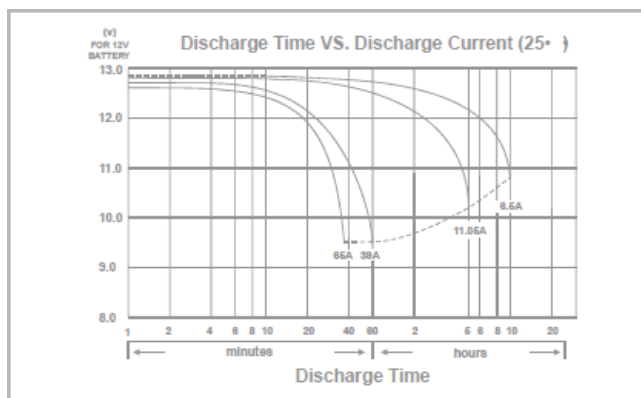

Terminal

